

Level pressure sensing transmitter type 681

Pressure range
0 ... 0.1 – 25 bar

The pressure transmitters of type 681 with piezoresistive measuring elements have compensated, calibrated and amplified sensor signals which are available as standard voltage or current outputs.

In the immersion-sensor version with a salt water and oil-resistant connection cable they are specially suited for level measurement, even in the presence of corrosive liquids.

The cable incorporates a tube for compensation of the ambient pressure.

Manufactured from stainless steel, its welded construction provides a water-tight seal.



- Mechanically protected diaphragm due to special head design
- Supplementary weight (option) improves stabilization of sensor in turbulent media
- Effective overload protection due to chemically etched chip diaphragm and specially designed glass gland
- Compact construction using SMD technology, enhances operational reliability in the presence of shock and vibration
- Welded construction provides 100% sealing against media

Technical overview

Pressure ranges ¹⁾

Relative	0 ... 25 bar
Absolute	optional available

Overload

3x pressure range, min. 3 bar

Rupture pressure

> 200 bar

Medium

Permissible medium	according order code selection table (other medium on request)
--------------------	----------------------------------------------------------------

Material

Diaphragm, case	Stainless steel 1.4435 (316L) Titan
Sealing material	FPM (other at request)
Cable	PUR, PE oder teflon

Temperature ²⁾

Medium temperature	-5 ... +80 °C
--------------------	---------------

Output and power supply ^{3) 4)}

	output	power supply	permissible load ⁵⁾
3 wire	0 ... 5 V 0 ... 10 V	12 ... 30 VDC 12 ... 30 VDC	> 10 kOhm > 10 kOhm
2 wire	4 ... 20 mA	9 ... 33 VDC	supply voltage - 9V 0.02 A [Ohm] max.
2 wire (Ex)	4 ... 20 mA	9 ... 28 VDC	supply voltage - 9V 0.02 A [Ohm] max.

Ex-version

	gas	dust
Ex-Admission	II 1G Ex ia IIB/IIC T3 ... T6	II 1D Ex iaD 20 IP6x T145 ... T70 °C
Standards	EN 60079-0 / EN 60079-11	EN 61241-0 / EN 61241-11

Temperature class Ex-version

	T6	T4
Medium temperature	-5 ... +50 °C	-5 ... +80 °C

Electrical connection

Cable	PUR, PE or teflon (In variable lengths)
-------	-----------------------------------------

Tests / Admissions

	norm	character	level
Mechanical load	EN 60068-2-6	vibration	10 g (4 ... 2000 Hz, oscillation ± 10 mpp)
	EN 60068-2-27	shock	100 g (pulse duration 6 ms)
Interference emit	EN 55022	emitted interference, class B	< 30 dBµV/m (0.03 ... 1 GHz)
	EN 61000-4-2	discharge static electricity	8 kV contact-, 15 kV air discharge
Interference resitance	EN 61000-4-3	electromagnetic radiation	10 V/m, 0.08 ... 2.7 GHz, 80% AM 1 kHz, 3 s
	EN 61000-4-4	fast transients (burst)	4 kV
	EN 61000-4-5	impulse voltage (surge)	Line-Line 0.5 kV/42 Ohm, Line-Earth 1 kV/42 Ohm
	EN 61000-4-6	grid-bound electromagnetic blockage	10 V, 0.15 ... 80 MHz, 80% AM 1 kHz, 3 s

Packaging

Single packaging	carton padded cellular material
------------------	---------------------------------

Weight

Without supplementary weight (without cable)	~ 145 g
With supplementary weight (without cable)	~ 405 g
Cable	~ 50 g/m

Accuracy

	total error band ^(*) [±%fs] per pressure ranges [bar]		
	0.1 ... 0.5	> 0.5 ... 2	> 2 ... 100
Characteristic line deviation [±%fs] 0.25 oder 0.1 (typ. / max.) -5 ... +50 °C	1.0 / 1.5	0.7 / 1.0	0.7 / 1.0
(typ. / max.) -5 ... +80 °C	2.0 / 2.5	1.0 / 1.5	1.0 / 1.5
Characteristic line deviation [±%fs] 0.05 (typ. / max.) -5 ... +50 °C	–	0.3 / 0.5	0.3 / 0.5
(typ. / max.) -5 ... +80 °C	–	0.75 / 1.0	0.75 / 1.0

^(*) total error band incl. characteristic line deviation, temperature error zero point and operating range, hysteresis and repeatability at max. signal range.

¹⁾ See order code selection table. Other on request.

²⁾ Compensated temperature range see order code selection table

³⁾ Short circuit proof with polarity reversal protection

⁴⁾ Influence from the supply voltage types < 0.05% fs

⁵⁾ Influence permissible load < 0.05% fs

Order code selection table			Cable	Case	681.	X	X	X	X	X	X	X	X	X	X	X
Medium ¹⁾	Fig. 1, 2, 3, 4	Diesel oil / fuel oil / kerosene	teflon	stainless steel	0											
	Fig. 1, 2	Salt water / brackish water	PUR	Titan	1											
	Fig. 1, 2, 3, 4	Drinking water, potable	PE	stainless steel	2											
	Fig. 1, 2, 3, 4	Lake water / river water	PUR	stainless steel	3											
	Fig. 1, 2, 3, 4	Benzene	teflon	stainless steel	4											
	Fig. 1, 2	Chlorinated water	PUR	Titan	5											
Pressure range ²⁾	0 ... 100 mbar					0	0									
	0 ... 160 mbar					0	1									
	0 ... 250 mbar					0	2									
	0 ... 400 mbar					0	3									
	0 ... 600 mbar					0	4									
	0 ... 1 bar					0	5									
	0 ... 1.6 bar					0	6									
	0 ... 2.5 bar					0	7									
	0 ... 4 bar					0	8									
	0 ... 6 bar					0	9									
	0 ... 10 bar					1	0									
0 ... 16 bar					1	1										
0 ... 25 bar					1	2										
Output / power supply	0 ... 5 V	12 ... 30 VDC						0								
	0 ... 10 V	12 ... 30 VDC						1								
	4 ... 20 mA	9 ... 33 VDC						3								
	4 ... 20 mA	9 ... 28 VDC		intrinsically safe version ³⁾				4								
Characteristic line deviation	≤ ±0.25% fs								1							
	≤ ±0.10% fs								2							
	≤ ±0.05% fs (≥ 0.5 ... 25 bar)							3,4	3							
Temperature range	-5 ... +50 °C compensated, medium temperature permissible: -5 ... +50 °C									0						
	-5 ... +80 °C compensated, medium temperature permissible: -5 ... +80 °C									1						
	Ex T6 (Ta: -5 ... +50 °C) -5 ... +50 °C compensated (medium temperature permissible: -5 ... +50 °C)								4	2						
	Ex T4 (Ta: -5 ... +80 °C) -5 ... +80 °C compensated (medium temperature permissible: -5 ... +80 °C)								4	3						
Cable length	Data in meters		(Example: 2 0)													
Construction	Fig. 1	closed, short case														0
	Fig. 1	closed, with supplementary weight ⁴⁾														1
	Fig. 2	open, short case														2
	Fig. 2	open, with supplementary weight ⁴⁾														3
	Fig. 3	closed, screwable version, short case														4
	Fig. 4	open, screwable version, short case														6
Version																N

¹⁾ Other medium on request

²⁾ Other pressure ranges on request

³⁾ II 1G Ex ia IIB/IIC T3...T6 / II 1D Ex iaD 20 IP6x T145...T70 °C

⁴⁾ Not available with titan case

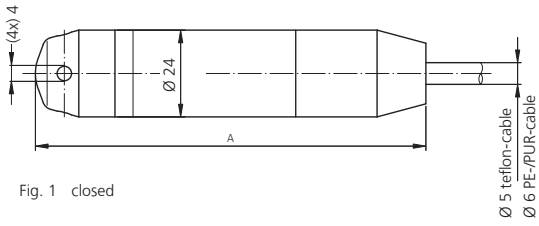


Fig. 1 closed

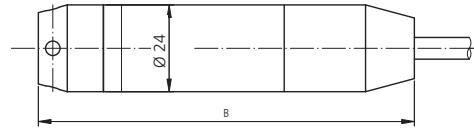


Fig. 2 open

	A (mm)	B (mm)
without supplementary weight	88	84
with supplementary weight	175	171

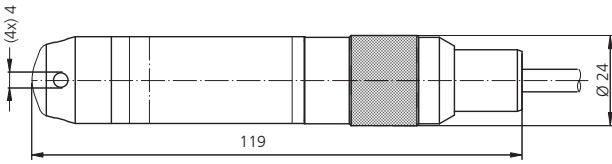


Fig. 3 closed, screwable version

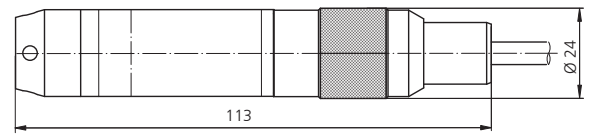


Fig. 4 open, screwable version

colour	2-wire	3-wire
white	IN	IN
yellow	OUT	GND
brown		OUT

Huba Control AG

Headquarters

Industriestrasse 17
5436 Würenlos
Telefon +41 (0) 56 436 82 00
Telefax +41 (0) 56 436 82 82
info.ch@hubacontrol.com

Huba Control AG

Niederlassung Deutschland

Schlattgrabenstrasse 24
72141 Walddorfhäslach
Telefon +49 (0) 7127 23 93 00
Telefax +49 (0) 7127 23 93 20
info.de@hubacontrol.com

Huba Control SA

Succursale France

Rue Lavoisier
Technopôle Forbach-Sud
57602 Forbach Cedex
Téléphone +33 (0) 387 847 300
Télécopieur +33 (0) 387 847 301
info.fr@hubacontrol.com

Huba Control AG

Vestiging Nederland

Hamseweg 20A
3828 AD Hoogland
Telefoon +31 (0) 33 433 03 66
Telefax +31 (0) 33 433 03 77
info.nl@hubacontrol.com

Huba Control AG

Branch Office United Kingdom

Unit 3 Network Point, Range Road
Witney Oxfordshire OX29 0YD
Phone +44 (0) 1993 776667
Fax +44 (0) 1993 776671
info.uk@hubacontrol.com

Huba Control AG

Rep. Office Singapore

No. 16 Ayer Rajah Crescent Witney
#06-06B Tempco Technominium
139965 Singapore
Phone +65 (0) 61 004 822
Fax +65 (0) 63 994 822
info.sg@hubacontrol.com

Huba Control AG

Rep. Office China

CBC Building, 49A Wuyi Road
Shanghai 200050
Phone +86 (0) 21 511 808 21
Fax +86 (0) 21 515 520 99
info.cn@hubacontrol.com